


Antirutsch-Sicherheitsmatte Gripwalk

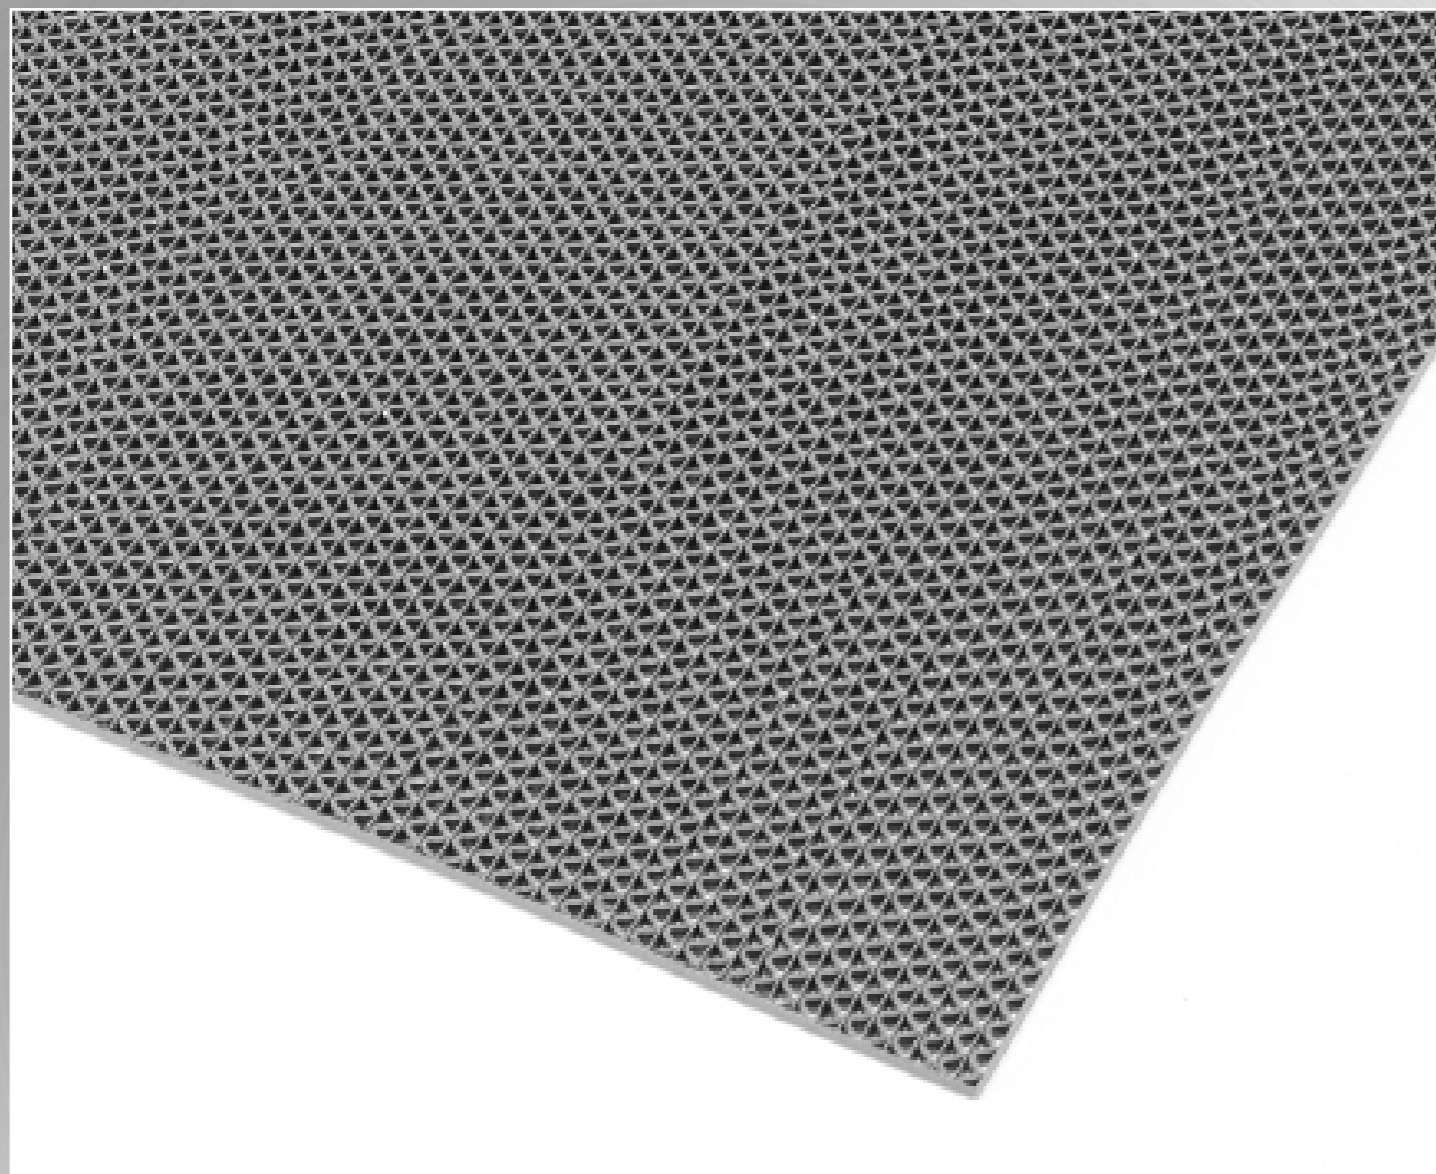

- Vinyl waves grid matting scrape dirt and moisture off shoes, allowing it to fall in to the mat and not be tracked in to the building (does not absorb water).
- Durable flexible material is ultra violet resistant, performs well in different climates and adapts to any surface.
- The Open wave grid of extruded vinyl creates a slip-resistant walking surface.
- Suitable for heavy traffic conditions.
- For placement interior facility entrances or recessed wells.
- Vacuum clean or wash off with hose.
- Free of toxic DOP and DMF.
- Easy to install and relocate. Easy to clean and requires little to no maintenance.
- Suitable for heavy duty use and will not flatten over time.

PRODUCT SPECIFICATIONS		
Designation	Dust Control Matting	
Description	Non-absorbent / scrape vinyl mat	
Material Top	Open wave design of extruded vinyl	
Backing	None	
Process	Extrusion	
Category	Outdoor Non-absorbent – Grid Matting	
Recommended use	In / outdoor - heavy foot traffic	
Colours	Grey	
Weight	8.5 kg/m ²	
Thickness	11 mm	
Standard sizes	91 cm x 12.2 m and 120 cm x 12.1 m	
Custom sizes	91 cm per linear meter, 120 cm per linear meter	
Special remarks	UV Resistance. Inhibiting to fungal growth in the mat.	
PRODUCT TESTING		
Tests	Norms	Results
Abrasion resistance ASTM D3884-01		
Colour fastness to light	ASTM D3884	
Accelerated wear test by sim floor machine	U.S.	
Accelerated soiling	U.S.	
Anti-slip	DIN 51130 and BG-RULE BGR181	
Water retention	U.S.	
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	
FIRE TESTING		
	Surface Flammability	ASTM D2859
	Classification of the reaction to fire performance	EN 13501-1 Pass
Sustainability		<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) • Contributes to cleaner environment by reducing need of cleaning chemicals

Zu beziehen bei:
 Werkzeug-Profi.net | Matten-Zuschnitt.de
 info@werkzeug-profi.net, 0 63 59/96 11 906